
DIN 3017-1

Fascette con vite senza fine, forma A
Clamps with worm gear drive, shape A

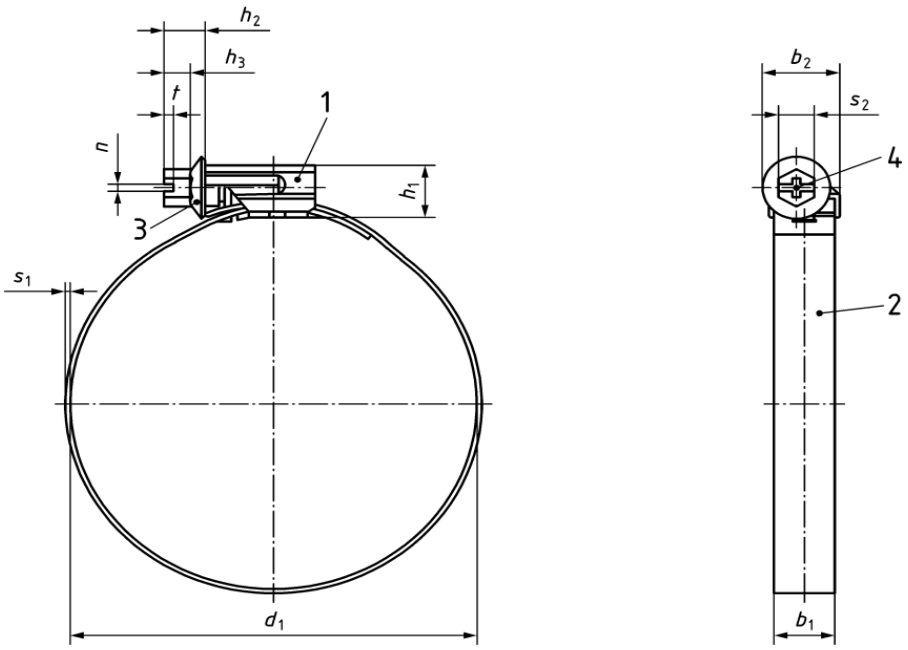

1 Alloggiamento vite — *1 Screw Housing*
2 Nastro — *2 Tape*
3 Testa della vite — *3 Screw Head*
4 Forma della testa — *4 Screw head shapes*

Nastro / *Tape* 9 mm ±1

Misure serrabili *Clamping range*	Spessore del nastro *Tape Thickness*	Alloggiamento *Housing*		Testa della vite *Screw Head*				
d_1	s_1	b_2 *max.*	h_1 *max.*	h_2 *±1*	h_3 *min.*	n *+0,31 +0,06*	s_2 *h13*	t *±0,3*
8 to 12	0,4 to 0,8	14	14	8	4	1,2	6 or 7	1,6
10 to 16								
12 to 18								
12 to 18	0,5 to 1,0						7	
12 to 22								
20 to 32								
25 to 40								
30 to 45								
35 to 50								
40 to 60								
50 to 70								
60 to 80								
70 to 90								
80 to 100								
90 to 110								
100 to 120								
110 to 130								
120 to 140								
130 to 150								
140 to 160								


disponibili in AISI304/W4 e AISI316/W5
availables AISI304/W4 and AISI316/W5

Viti in acciaio inossidabile, sottoposte ad un ulteriore trattamento di zincatura (CR+3), per una maggior presa sul nastro.
Stainless Steel screws, submitted to a further galvanizing treatment (zinc plated CR+3) for greater grip on the tape.

last edit 28/08/2023
DRAWING N. 1268

DIN 3017-1

Fascette con vite senza fine, forma A
Clamps with worm gear drive, shape A

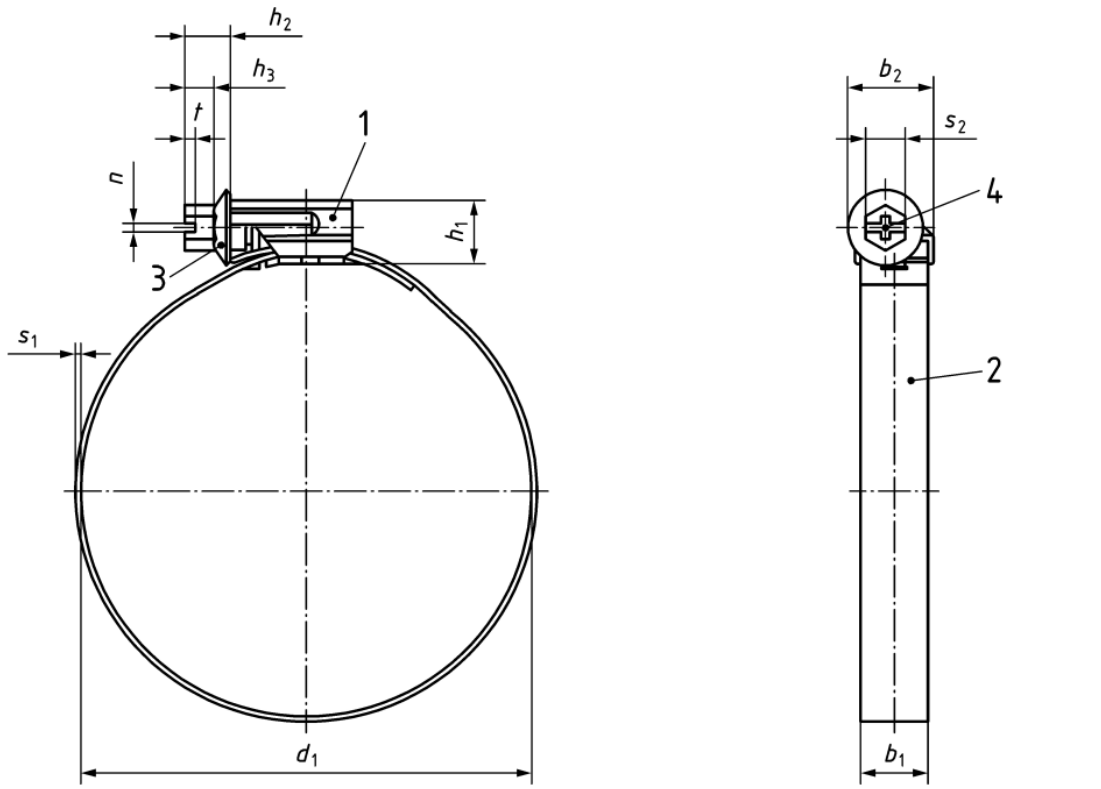

1 Alloggiamento vite *1 Screw Housing*
2 Nastro *2 Tape*
3 Testa della vite *3 Screw Head*
4 Forma della testa *4 Screw head shapes*

Nastro / *Tape* 12 mm ±2

Misure serrabili *Clamping range*	Spessore del nastro *Tape Thickness*	Alloggiamento *Housing*		Testa della vite *Screw Head*				
d_1	s_1	b_2 *max.*	h_1 *max.*	h_2 *±1*	h_3 *min.*	n *+0,31 +0,06*	s_2 *h13*	t *±0,3*
12 to 22	0,5 to 1,0	20	16	8	4	1,2	7 or 8	1,6
16 to 27								
20 to 32								
25 to 40								
30 to 45								
35 to 50								
40 to 60								
50 to 70								
60 to 80								
70 to 90								
80 to 100								
90 to 110								
100 to 120								
110 to 130								
120 to 140								
130 to 150								
140 to 160								

disponibili in AISI304/W4 e AISI316/W5
availables AISI304/W4 and AISI316/W5

Viti in acciaio inossidabile, sottoposte ad un ulteriore trattamento di zincatura (CR+3), per una maggior presa sul nastro.
Stainless Steel screws, submitted to a further galvanizing treatment (zinc plated CR+3) for greater grip on the tape.

last edit 28/08/2023
DRAWING N. 1268